

Produkt beregnet som reservedel. Uten hus.



Beskrivelse	Radialvifte uten hus, reservedel
Spenning	1~230 VAC
Frekvens	50 / 60 Hz
Effekt	0,117 kW
Merkestrøm	1,1 A
Turtall	2170 rpm
Temperaturområde	-25...+40 °C
Rotasjonsretning	Medurs sett fra rotorsiden
Motor	EC-motor med integrert elektronikk
Motorbetegnelse	M3G055-CF
Motorvern / Vern	Innebygd termokontaktmotorvernet, tilbakestilles ved å bryte nettspenningen
Kapslingsklasse	IP54
Isolasjonsklasse motor	B
Lagertype	Kulelager
Materiale	Viftehjul med foroverbøyde skovler produsert av plast, PA
Viftehjul	F-hjul
Elektrik tilkobling	Stikk-kontakt med anslutningskabel 468 mm
Oppfylte standarder	EN 60034-1; EN 60204-1; EN 60335-1; CE
C-mål	72 mm
Vekt	1.2 kg
Styresignal	0-10 VDC
Art.nr.	R3G140AW1759

Se www.ebmpapst.no for oppdatert informasjon




R3G140-AW17-59 Reservdel

Radialvifte uten hus, reservedel

Diagram

Curves: Air performance 50 Hz

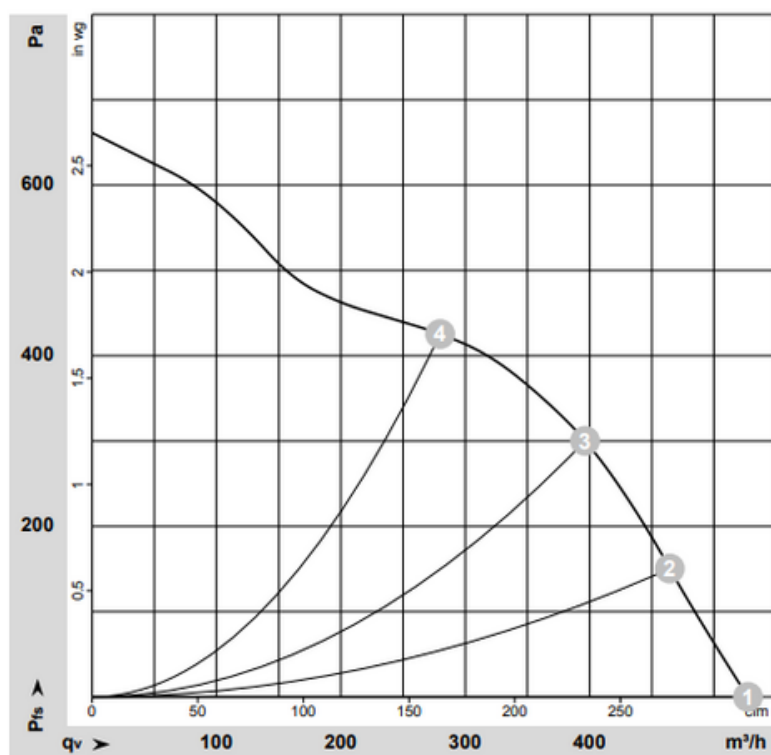

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-156037-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	P _{ts}	q _v	P _{ts}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	2170	117	1.10	525	0	310	0.00
2	230	50	2355	117	1.10	465	150	275	0.60
3	230	50	2575	111	1.01	395	300	235	1.20
4	230	50	2875	89	0.83	280	425	165	1.71

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_s = Pressure increase

Kontakt

ebm-papst AS

Nordåsveien 5

1251 Oslo

Telf: 22 76 33 40

Fax: 22 61 91 73

mailbox@ebmpapst.no

www.ebmpapst.no